



ISO 9001 : 2015



INOX DOAN CO., LTD.

Head Office
745 Ly Thuong Kiet Str, Tan Binh Dist,
HCMC, Vietnam
Tel: (84-8) 3864 0060
Fax: (84-8) 3863 7470
Email: sale@inoxdoan.com.vn

Binh Tan Branch / Main Warehouse / Works
537A National Route 1A, Binh Tan Dist,
HCMC, Vietnam
Tel: (84-8) 3767 0888
Fax: (84-8) 3767 0999
Email: sale@inoxdoan.com.vn

Can Tho Branch
404 Le Hong Phong, Binh Thuy Ward, Binh Thuy Dist,
Can Tho City, Vietnam
Tel: (84-710) 388 3357
Fax: (84-710) 388 3359
Email: sale.ct@inoxdoan.com.vn

Showroom
743 Ly Thuong Kiet Str, Tan Binh Dist,
HCMC, Vietnam
Tel: (84-8) 3864 0060
Fax: (84-8) 3863 7470
Email: sale@inoxdoan.com.vn

Tan Binh Warehouse
1129/12/15 Lac Long Quan Str, Tan Binh Dist,
HCMC, Vietnam
Tel: (84-8) 3864 0965
Fax: (84-8) 3971 8596
Email: sale@inoxdoan.com.vn

Subsidiary Company
SMT Precision Machining & Engineering Co., LTD.
537A National Route 1A, Binh Tan Dist, HCMC, Vietnam
Tel: (84-8) 2210 7199
Email: info@smtvn.com

*The Destination of Prestige
and Quality*

INTRODUCTION	3
STAINLESS STEEL HR/CR	4
STAINLESS STEEL HR/CR SHEET & PLATE	5
STAINLESS STEEL ROUND BAR, HEXAGON BAR, SQUARE BAR	6
STAINLESS STEEL FLAT BAR	7
STAINLESS STEEL WIRE / WIRE ROD	8
STAINLESS STEEL WIRE MESH	9
STAINLESS STEEL PIPES ASTM A312	10
STAINLESS STEEL SQUARE & RECTANGULAR PIPES ASTM A312	11
STAINLESS STEEL TUBES ASTM A554	12
STAINLESS STEEL SQUARE & RECTANGULAR TUBES ASTM A554	13
STAINLESS STEEL FITTINGS	14
STAINLESS STEEL SANITARY FITTINGS	15
STAINLESS STEEL VALVES	16
STAINLESS STEEL APPLICATIONS	17
CHEMICAL COMPOSITION OF STAINLESS STEEL	18 & 19



Founded in the 1980s, Inox Doan Manufacturing - Trading Limited Company is officially established in 2003 and continued to determine its leading position in the stainless steel industrial field in Vietnam. We are proud of being the top in prestige on stainless steel importer and distributor – with high quality from Germany, Spain, Japan, India, Korea, Taiwan,... widely applied in machinery manufacturing industry, oil and gas, ship building, medical equipments, food processing and household appliances.

Our mainly available products currently includes: Stainless steel Coil, Sheet & Plate; Stainless steel bright bar (Round bar, Hexagon bar, Square bar, Flat bar, Angle bar); Stainless steel Wire & Wire Rod, Wire Mesh; Stainless steel Pipe; Stainless steel Tube; Stainless steel Fitting, Flange and Valve; Stainless steel Sanitary Fitting & Valve ... accompanying with handling services according to customer's need: Cutting, Shearing, Sawing, Welding, Bending, Sheet bending, Polishing, Grinding, Painting, Powder coating, Assembly, Drilling, Edge Bending, Tube bending ...

Our imported products supplying in the market have totally been certified being fit for the international standards such as: ASTM, AISI, SUS, JIS, ... and operated by the distribution system strictly complying with quality management standard ISO 9001: 2008. Besides, Inox Doan trade mark is proud of to be attested as one of the most reliable suppliers, prestigious brand name, the 3-year consecutive gaining the Gold Vietnam Enterprise title from the Vietnam Enterprise Institute.

The great support and belief from friendly customers over 30 years to us together with the incessant contribution of the enthusiastic staffs have lead us to the solid achievements in the stainless steel field as today. The customer's success and thriving is the main focus in the unshakeable development of Inox Doan.



STAINLESS STEEL HR/CR COIL

STANDARD: ASTM A240/A480, JIS G4304/G4305, EN 10028-7/10088-2
GRADE: 200 series & 300 series & 400 series
LENGTH: According to customers' request
THICKNESS: CR Coil: 0.3mm~8.0mm; HR Coil: 2.0mm~12.7mm
WIDTH: 914mm~2000mm
SURFACE: NO.1, 2B, NO.4, BA, Hair Line.
ORIGIN: Japan, Europe, Malaysia, South Africa, India, South Korea, Taiwan
APPLICATION: Petro-chemical industry, Tanks, Medical equipment, Food industry, Construction material, Kitchen utensils, BBQ grill, Building construction, Electric equipment, etc.


Grade	Finish	Thickness (mm)	Width (mm)						
			914	1000	1219	1250	1500	1524	2000
304 / 304L	NO.1	2.0~12.7							
	2B	0.3~3.0							
		4.0~8.0							
	NO.4	0.4~3.0							
	BA	0.3~1.5							
316 / 316L	HL	0.4~3.0							
	NO.1	2.0~12.7							
	2B	0.3~3.0							
		4.0~8.0							
	NO.4	0.4~3.0							
	BA	0.3~1.5							
430	HL	0.4~3.0							
	NO.1	2.0~12.7							
	2B	0.3~3.0							
		4.0~8.0							
	NO.4	0.4~3.0							
	BA	0.3~1.5							



STAINLESS STEEL HR/CR SHEET & PLATE

STANDARD: ASTM A240/A480, JIS G4304/G4305, EN 10028-7/10088-2
GRADE: 200 series & 300 series & 400 series
LENGTH: According to customers' request
THICKNESS: CR Sheet: 0.4mm~6.0mm; HR Sheet: 2.0mm~30mm
WIDTH: 914mm~2000mm
SURFACE: NO.1, 2B, NO.4, BA, Hair Line.
ORIGIN: Japan, Europe, Malaysia, South Africa, India, South Korea, Taiwan
APPLICATION: Petro-chemical industry, Tanks, Medical equipment, Food industry, Construction material, Kitchen utensils, BBQ grill, Building construction, Electric equipment, etc.


Grade	Finish	Thickness (mm)	Width (mm)						
			914	1000	1219	1250	1500	1524	2000
304 / 304L	NO.1	2.0~10.0							
		12.0~12.7							
		13.0~30.0							
	2B	0.4							
		3.5~4.0							
	BA	0.4~1.5							
		1.6~2.0							
316 / 316L	NO.1	3.0~10.0							
		12.0~12.7							
		13.0~30.0							
	2B	4.5~6.0							
430	NO.1	3.0~6.0							
	2B	0.5~3.0							
	BA	0.4~1.2							
		1.3~2.0							

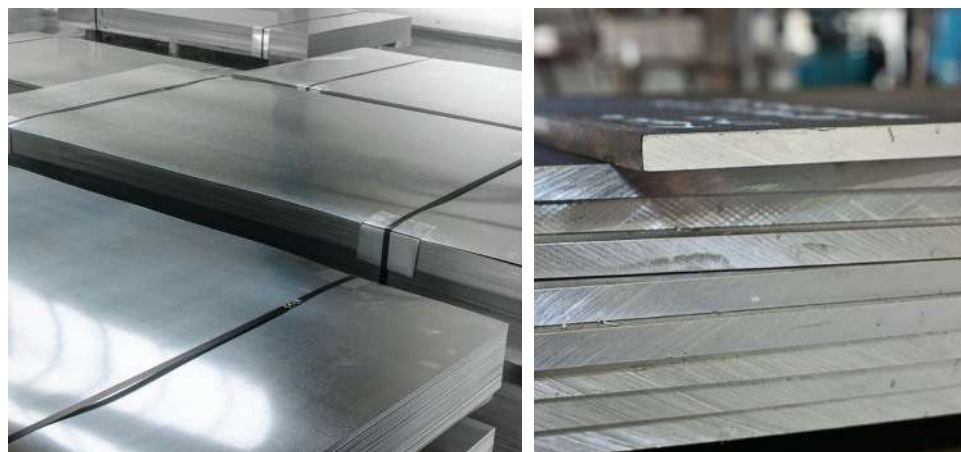

STAINLESS STEEL ROUND BAR, HEXAGON BAR, SQUARE BAR

STANDARD: ASTM A276, AISI, JIS G4303, DIN
GRADE: 200 series & 300 series & 400 series
DIAMETER: 2mm-200mm (0.08"~8")
TOLERANCE: H8, H9, H10, H11, K12, K13, DIN 1103
SURFACE: Bright
ORIGIN: Japan, Europe, India, South Korea, Taiwan
APPLICATION: Ships building industry, Automobile industry, electric motor industry, railways, defence, shaft making, agriculture, health & sports, textile, decorative & furniture, hoses and fittings, bearings, hinges and gears, oil and petroleum sector, mining, etc.

Product	Size Range (mm)	Size Range (Inch)	Tolerances
Cold Drawn Bars or Cold Drawn + Polished Bars			
Round	2 to 35	0.08 to 1½	H8, H9, H10, H11
Hexagon	5 to 76.2	0.196 to 3	H11
Square	5 to 76.2	0.196 to 3	H11
Peeled and Polished			
Round	16 to 200	5/8 to 8	H9, H11, K12
Rolled Bar (Rough Peeled)			
Round	100 to 200	4 to 8	DIN 1013

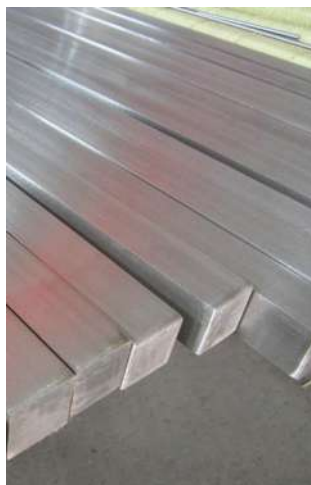

STAINLESS STEEL FLAT BAR



STANDARD: ASTM A276/A484M
GRADE: 200 series & 300 series & 400 series
O.D.: 15~150mm
W.T.: 2.0~12.0mm
TOLERANCE: ASTM A276/A484M
SURFACE: Bright
ORIGIN: Japan, Europe, India, South Korea, Taiwan
APPLICATION: Industrial tools, mechanical parts, structure and escalator for construction, etc

Width (mm)	Thickness (mm)								
	2	3	4	5	6	8	9	10	12
15									
20									
25									
30									
32									
35									
38									
40									
50									
60									
65									
70									
75									
80									
100									

STAINLESS STEEL ANGLE BAR



STANDARD: ASTM A276/A479, ASME SA479
GRADE: 200 series & 300 series & 400 series
O.D.: 20x20~100x100mm
W.T.: 1.5~25.0mm
SURFACE: Bright
ORIGIN: Japan, Europe, India, South Korea, Taiwan
APPLICATION: Construction steel, machinery and equipment building, etc.

Outside (mm)	Thickness (mm)									
	1.5	2	2.5	3	4	5	6	7	8-9	10
20x20										
25x25										
30x30										
40x40										
50x50										
65x65										
75x75										
100x100										

STAINLESS STEEL WIRE



STANDARD: ASTM A580, JIS G4309
GRADE: 200 series & 300 series & 400 series
DIAMETER: 0.018mm-15mm
SURFACE: bright, matt finish
ORIGIN: Japan, Europe, India, South Korea, Taiwan
APPLICATION: wire-drawing, weaving of wire mesh, soft pipe, beam of cabinet, steel wire rope, filter material and equipment, spring, bicycle fittings, kitchen and sanitation tools, goods shelf, pet cages, gill racks, decorative handles and baskets, food and medical machinery accesses, etc.
TYPES: Spring Wire, Cold heading Wire, Tiny Wire, Welding Wire




STAINLESS STEEL WIRE ROD

STANDARD : ASTM A580, JIS G4309
GRADE: 200 series & 300 series & 400 series
DIAMETER: 5.5~34.0mm
SURFACE: NO.1, NO.2, NO.3
APPLICATION: stainless steel fasteners, stainless steel mesh, welding wire (core wire), redrawing wire, kitchen ware, cleaning ball, medical equipment, air valve.

Diameter of Wire Rod

Diameter (mm)	Diameter (mm)	Diameter (mm)	Diameter (mm)	Diameter (mm)	Diameter (mm)
5.5	8.1	11.0	14.5	18.5	24.0
5.7	8.3	11.2	14.7	19.0	25.0
6.0	8.5	11.5	15.0	19.5	26.0
6.15	8.7	11.9	15.5	20.0	26.5
6.35	9.0	12.0	15.7	20.5	27.0
6.5	9.5	12.3	16.0	21.0	28.0
6.75	9.7	12.5	16.3	21.5	30.0
7.0	10.0	12.7	16.5	22.0	31.0
7.3	10.3	13.0	17.0	22.7	32.0
7.5	10.5	13.5	17.5	23.0	33.0
8.0	10.7	14	18	23.5	34

STAINLESS STEEL WIRE MESH



STANDARD: ASTM E 2016-11, ANSI -01-1992
GRADE: 304, 304L, , 316, 316L
WIRE DIAMETER: 0.022mm ~ 3.5mm
SURFACE: bright and shining
ORIGIN: Japan, Europe, India, South Korea, Taiwan
APPLICATION:

304: Sorting and screening of abrasives, liquids, powders and other solids
 316: Processing of oils and foods, chemicals, and pharmaceuticals
TYPES: Wire cloth, Plain weave, Twilled weave, Dutch weave, etc.

Specification list of Stainless Steel Wire Mesh / Woven Wire Cloth

Meshes/ Inch	Diameter of Wire (mm)	Width of Opening (mm)	Open Area, %
1	3.50	21.97	74.8
1	3.00	22.35	77.4
1	2.50	22.73	80.1
1	2.00	23.36	84.6
2 x 2	3.00	9.65	57.8
2 x 2	2.50	10.03	62.4
2 x 2	2.00	10.66	70.6
2 x 2	1.60	11.10	76.4
2 x 2	1.20	11.50	82.1
3 x 3	2.00	6.42	57.6
3 x 3	1.60	6.85	65.6
3 x 3	1.20	7.26	73.6
4 x 4	2.00	4.31	46.2
4 x 4	1.60	4.75	56.0
4 x 4	1.20	5.15	65.9
5 x 5	1.20	3.88	58.5
5 x 5	1.00	4.01	63.2
6 x 6	1.60	2.64	38.9
6 x 6	1.20	3.04	51.8
6 x 6	0.90	3.35	62.7
8 x 8	1.60	1.57	24.6
8 x 8	1.20	1.98	38.9
8 x 8	0.90	2.28	51.8
8 x 8	0.80	2.36	55.4
8 x 8	0.70	2.46	60.2
10 x 10	1.20	1.34	28.1
10 x 10	0.90	1.65	42.3
10 x 10	0.80	1.27	46.2
10 x 10	0.63	1.90	56.3

Specification list of Stainless Steel Wire Mesh / Woven Wire Cloth



Meshes/ Inch	Diameter of Wire (mm)	Width of Opening (mm)	Open Area, %
12 x 12	1.00	1.06	25.4
12 x 12	0.90	1.22	33.2
12 x 12	0.80	1.29	37.5
12 x 12	0.70	1.39	43.6
12 x 12	0.58	1.52	51.8
14 x 14	0.80	1.52	29.8
14 x 14	0.63	0.99	41.5
14 x 14	0.58	1.22	45.2
14 x 14	0.50	1.30	51.0
16 x 16	0.70	0.89	30.5
16 x 16	0.58	1.01	39.9
16 x 16	0.45	1.14	50.7
18 x 18	0.50	0.91	41.1
18 x 18	0.45	0.96	48.3
20 x 20	0.58	0.68	29.2
20 x 20	0.50	0.76	36.0
20 x 20	0.45	0.81	41.0
20 x 20	0.40	0.86	46.2
24 x 24	0.35	0.71	44.2
28 x 28	0.25	0.66	51.8
30 x 30	0.33	0.50	37.1
30 x 30	0.30	0.53	40.8
35 x 35	0.30	0.43	33.8
35 x 35	0.25	0.48	42.4
40 x 40	0.35	0.28	19.3
40 x 40	0.30	0.33	27.4
40 x 40	0.25	0.38	36.0
40 x 40	0.24	0.40	38.4
50 x 50	0.23	0.28	30.3



STANDARD: ASTM A312/A358/A778, JIS G3459
GRADE: 200 series & 300 series & 400 series
O.D. : 1/4"~26" (13.72~660.40mm)
W.T.: SCH-5S, SCH-10S, SCH-20S, SCH-40S
SURFACE: NO.1, 2B
ORIGIN: Japan, Europe, India, South Korea, Taiwan
APPLICATION: Chemical & Petrochemical use, etc.

Nominal Diameter		Outside Diameter		Nominal Wall Thickness (mm)							
				SCH 5S		SCH10S		SCH20S		SCH40S	
DN	NPS (inch)	ASTM (mm)	JIS (mm)	ASTM (mm)	JIS (mm)	ASTM (mm)	JIS (mm)	ASTM (mm)	JIS (mm)	ASTM (mm)	JIS (mm)
8	1/4	13.72	13.80	-	1.20	1.65	1.65	-	2.00	2.24	2.20
10	3/8	17.15	17.30	-	1.20	1.65	1.65	-	2.00	2.31	2.30
15	1/2	21.34	21.70	1.65	1.65	2.11	2.10	-	2.50	2.77	2.80
20	3/4	26.67	27.20	1.65	1.65	2.11	2.10	-	2.50	2.87	2.90
25	1	33.40	34.00	1.65	1.65	2.77	2.80	-	3.00	3.38	3.40
32	1 1/4	42.16	42.70	1.65	1.65	2.77	2.80	-	3.00	3.56	3.60
40	1 1/2	48.26	48.60	1.65	1.65	2.77	2.80	-	3.00	3.68	3.70
50	2	60.33	60.50	1.65	1.65	2.77	2.80	-	3.50	3.91	3.90
65	2 1/2	73.03	76.30	2.11	2.10	3.05	3.00	-	3.50	5.16	5.20
80	3	88.90	89.10	2.11	2.10	3.05	3.00	-	4.00	5.49	5.50
90	3 1/2	101.60	101.60	2.11	2.10	3.05	3.00	-	4.00	5.74	5.70
100	4	114.30	114.30	2.11	2.10	3.05	3.00	-	4.00	6.02	6.00
125	5	141.30	139.80	2.77	2.80	3.40	3.40	-	5.00	6.55	6.60
150	6	168.28	165.20	2.77	2.80	3.40	3.40	-	5.00	7.11	7.10
200	8	219.08	216.30	2.77	2.80	3.76	4.00	-	6.50	8.18	8.20
250	10	273.05	267.40	3.40	3.40	4.19	4.00	-	6.50	9.27	9.30
300	12	323.85	318.50	3.96	4.00	4.57	4.50	-	6.50	9.53	10.30
350	14	355.60	355.60	3.96	-	4.78	-	-	-	9.53	11.10
400	16	406.40	406.40	4.19	-	4.78	-	-	-	9.53	12.70
450	18	457.20	457.20	4.19	-	4.78	-	-	-	9.53	14.30
500	20	508.00	508.00	4.78	-	5.54	-	-	-	9.53	15.10
550	22	558.80	558.80	4.78	-	5.54	-	-	-	-	15.90
600	24	609.60	609.60	5.54	-	6.35	-	-	-	9.53	17.50
650	26	660.40	660.40	-	-	-	-	-	-	-	18.90

STANDARD: ASTM A312/A269, DIN 17457/17455
GRADE: 200 series & 300 series & 400 series
O.D.: Square pipe: 30x30mm~200x200mm. Rectangular pipe: 25x50~150x250mm.
W.T.: 2.0~20.0mm
SURFACE: NO.1, 2B
ORIGIN: Japan, Europe, India, South Korea, Taiwan
APPLICATION: Ship Builders, Automotive Industry, Power Generation, Food Industry, Paper Industry, Pharmaceutical Industry, Chemical Industry, Oil and Gas Industry, etc.

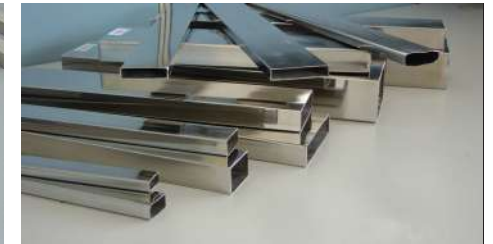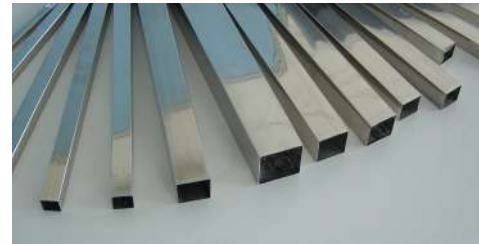

SQUARE PIPE

Outside Diameter (mm)	Thickness (mm)					
	3.0	4.0	5.0	6.0	8.0	10.0
30x30						
40x40						
50x50						
60x60						
80x80						
100x100						
120x120						
150x150						
200x200						

RECTANGULAR PIPE

Outside Diameter (mm)	Thickness (mm)					
	3.0	4.0	5.0	6.0	8.0	10.0
25x50						
30x60						
40x80						
50x100						
50x150						
60x120						
80x120						
80x150						
100x150						
100x200						
100x300						
150x200						
150x250						

STAINLESS STEEL TUBES ASTM A554



STANDARD: ASTM A554, JIS G3446
GRADE: 200 series & 300 series & 400 series
O.D.: 3/8"~4 1/2" (9.5~114.3mm)
W.T.: 0.3~2.0mm
SURFACE: 2B, BA
ORIGIN: Japan, Europe, India, South Korea, Taiwan, Malaysia
APPLICATION: Ornamental tubing

Outside Diameter		Nominal Wall Thickness (mm)									
inch	mm	0.3	0.4	0.5	0.6	0.8	1	1.2	1.5	1.65	2
3/8	9.5										
1/2	12.7										
5/8	15.9										
3/4	19.05										
7/8	22.2										
1	25.4										
1 1/4	27.2										
1 1/4	31.8										
1 1/2	38.1										
-	42.4										
2	50.8										
-	60.3										
2 1/2	63.5										
3	76.2										
3 1/2	88.9										
4	101.6										
4 1/2	114.3										

STAINLESS STEEL SANITARY TUBES ASTM A269/A270



STANDARD: ASTM A269/A270, JIS G3447/G3463
GRADE: 300 series
O.D.: ASTM A270: 1/2"~4" (12.7~101.6mm),
 ASTM A269: 6"~12" (152.4~304.8mm)
W.T.: 1.20~2.11mm
SURFACE: 2B, BA
ORIGIN: Japan, Europe, India, South Korea, Taiwan, Malaysia
APPLICATION: Dairy, Food, Beverage, and Other Sanitary Processes

Outside Diameter		Nominal Wall Thickness				
inch	mm	(inch)	0.049	0.065	0.083	0.109
		(mm)	1.25	1.65	2.11	2.77
1/2	12.7					
3/4	19.1					
1	25.4					
1 1/2	38.1					
2	50.8					
2 1/2	63.5					
3	76.2					
4	101.6					
6	152.4					
8	203.2					
10	254.0					
12	304.8					
14	355.6					

STAINLESS STEEL SQUARE & RECTANGULAR TUBES ASTM A554



STANDARD: ASTM A554
GRADE: 200 series & 300 series & 400 series
O.D.: Square Tubes: 10x10~100x100mm.
 Rectangular Tubes: 10x20~50x100mm.
W.T.: 0.3~2.11mm
SURFACE: 2B, BA, HL
ORIGIN: Japan, Europe, India, South Korea, Taiwan, Malaysia
APPLICATION: Ornamental tubing

SQUARE TUBES

Outside Diameter		Thickness (mm)									
inch	mm	0.3	0.4	0.5	0.6	0.8	1	1.2	1.5	1.6	2
-	10.0x10.0										
1/2x1/2	12.7x12.7										
-	15.0x15.0										
3/4x3/4	19.05x19.05										
-	20.0x20.0										
7/8x7/8	22.2x22.2										
1x1	25.4x25.4										
-	30.0x30.0										
1 1/4x1 1/4	31.75x31.75										
1 1/2x1 1/2	38.1x38.1										
-	40.0x40.0										
2x2	50.8x50.8										
-	60.0x60.0										
-	80.0x80.0										
-	100.0x100.0										

RECTANGULAR TUBES

Outside Diameter		Thickness (mm)									
inch	mm	0.3	0.4	0.5	0.6	0.8	1	1.2	1.5	1.6	2
-	10x20										
-	12x25										
-	10x(30/40/50)										
-	15x30/20x30										
3/4x1 1/2	19.05x38.1										
-	20x40										
1x2	25.4x50.8/ 25x50										
-	30x60										
1x3	25.4x76.2/25x75										
-	40x60										
-	40x80/45x75										
-	45x95/50x100										

Stainless Steel Fittings and Stainless Steel Pipe Fittings are used in water supply pipelines, industrial food processing pipe industry, chemical industry, petroleum industry and in various other fluid transfer piping systems.



Butt Weld Pipe Fittings

STANDARD: ASTM A403M (Austenitic grades), ASTM A815M (Duplex grades), ASME B16.9.
GRADE: 304/304L, 316/316L, DIN 1.4301, DIN 1.4306, DIN 1.4401, DIN 1.4404, DIN 1.0405
DIMENSION: ANSI B16.9, ANSI B16.28, JIS B2312, JIS B2313
SIZE: Seamless Fittings: 1/2"~30", Welded Fittings: 1/2"~80"
THICKNESS: SCH 5S, 10S, 20S, 40S, 80S, XS, XXS, STD.
FORM: Elbows 45° & 90° (long radius and short radius), Return bends 180° (long radius and short radius), Reducers (concentric and eccentric), Tees (equal and reducing), Caps, Stub ends - short length.



Socket Weld Fittings

STANDARD: ASTM A182, ASME B16.11.
GRADE: 304/304L, 316/316L, DIN 1.4301, DIN 1.4306, DIN 1.4401, DIN 1.4404, DIN 1.0405
DIMENSION: ASME B16.11
SIZE: 1/2"~4"
THICKNESS: SCH 80, SCH 160, XS, XXS.
FORM: Elbows 45° & 90°, Tees, Crosses, Couplings, Half-Couplings, End or P



Threaded Fittings

STANDARD: ASTM A182, ASME B16.11.
GRADE: 304/304L, 316/316L
DIMENSION: ASME B1.20.1
SIZE: 1/2"~4"
THICKNESS: SCH 80, SCH 160, XS, XXS.
FORM: Elbows 45° & 90°, Tees, Crosses, Couplings, Half-Couplings, Caps



Flanges

STANDARD: ASTM A182
GRADE: Austenitic grades: 304/304L, 316/316L.
 Duplex grades: SAF 2205 / UNS S31803 / EN 1.4462.
 Super-duplex grades: SAF 2507 / NS S32750 / EN 1.4410
DIMENSION: ASME B16.5
SIZE: 1/2"~60" (DN15~DN1500)
PRESSURE: Class 150, Class 300, Class 400, Class 600, Class 900, Class 1500, Class 2500
TYPE: Weld Neck, Threaded, Slip-On, Socket Weld, Lap Joint, Blind, Orifice Flange, Orifice Plate and Restriction Orifice Plate, Spectacle Blind, Spacer, Blanks
FACE TYPE: Flat Face (FF), Raise Face (RF), Ring Type Joint (RTJ)

Sanitary process piping and fittings are used almost exclusively in the food, dairy, beverage, brewing, cosmetic, biotechnology, pharmaceutical, and personal care industries.



Sanitary Clamp Fittings

GRADE: 304, 316
SIZE: O.D.: 1"~4"
FINISHED: NO.7 ID and OD
TYPE: Ferrules, Caps, Elbows, Tees, Crosses & Wyes, Reducers, Adapters



Sanitary Butt-Weld Fittings

STANDARD: ASTM A182, ASTM A403, ASTM A815
GRADE: 304, 316
SIZE: O.D.: 1"~4"
FINISHED: NO.7 ID and OD
TYPE: 90° Tube Bend, 45° Tube Bend, 90° Sweep ELL, 90° ELL, 45° Sweep ELL, 45° ELL, 90° Inspection Elbow, Tees & Reducing Tees, Cross, Concentric Reducers, Eccentric Reducers, Caps.



Sanitary Bevel Seat Fittings

GRADE: 304, 316
SIZE: O.D.: 1"~4"
FINISHED: NO.7 ID and OD
TYPE: Ferrules, Caps, Elbows, Tee, Crosses & Wyes, Reducers, Adapters.





Valves

GRADE: 304/304L, 316/316L

SIZE: 1/4"~4"

TYPE: Ball Valves, Cast Steel Globe Valves, Cast steel Gate Valves, Cast Steel Check Valves, Flush Bottom Valves, Butterfly Valves, Steam Traps, Pilot Operated Pressure, Reducing Valves, Safety Valves, Butterfly Valves, Saunders – Diaphragm Valves, Strainers, Disc Check Valves, etc.



Sanitary Ball Valves

GRADE: 316L

SIZE: 1/2"~4"

TYPE: 3-piece Encapsulated Sanitary Ball Valves
3-way and 4-way Multiport Sanitary Ball Valves
3-piece Non-Encapsulated Sanitary Ball Valves
2-way Sanitary Encapsulated Seat Ball Valves
High Purity Ball Valves



Sanitary Butterfly Valves

GRADE: 304, 316L

SIZE: 1"~4"

TYPE: Wafer-style Butterfly Valves,
Lug-style Butterfly Valves



Sanitary Check Valves

GRADE: 304, 316L

SIZE: 1"~4"

TYPE: Sanitary Spring Disc Check Valves
Sanitary Y-Ball Check Valves
Sanitary Spring Disc Horizontal Check Valves
Sanitary Air Blow Check Valves

Sanitary Diaphragm Valves

GRADE: 304, 316L

SIZE: O.D.: 1/4" to 4"

TYPE: Weir Diaphragm Valves
Straightway Diaphragm Valves

Sanitary Sample Valves

GRADE: 316/316L

SIZE: 1/8", 1/4", 3/8", 1/2", 1", 1 1/2"

TYPE: Line sampling and injection Valves
Wafer sampling Valves
Screw in sampling valves
Submersed sampling Valves



CHEMICAL COMPOSITION OF STAINLESS STEEL

Grade (AISI)	Chemical Composition (%)										OTHER
	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	N	
Austenitic group											
201	Max.0.15	Max.1.00	5.50~7.50	Max.0.060	Max.0.030	3.50~5.50	16.00~18.00	-	-	Max.0.25	-
202	Max.0.15	Max.1.00	7.50~10.00	Max.0.060	Max.0.030	4.00~6.00	17.00~19.00	-	-	Max.0.25	-
301	Max.0.15	Max.1.00	Max.2.00	Max.0.045	Max.0.030	6.00~8.00	16.00~18.00	-	-	-	-
302	Max.0.15	Max.1.00	Max.2.00	Max.0.045	Max.0.030	8.00~10.00	17.00~19.00	-	-	-	-
303	Max.0.15	Max.1.00	Max.2.00	Max.0.200	Min.0.15	8.00~10.00	17.00~19.00	-2	-	-	-
303Se	Max.0.15	Max.1.00	Max.2.00	Max.0.200	Max.0.060	8.00~10.00	17.00~19.00	-	-	-	Se Min.0.15
-	Max.0.15	Max.1.00	Max.3.00	Max.0.200	Min.0.15	8.00~10.00	17.00~19.00	-2	1.50~3.50	-	-
304	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	8.00~10.50	18.00~20.00	-	-	-	-
304L	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	9.00~13.00	18.00~20.00	-	-	-	-
304N	Max.0.08	Max.1.00	Max.2.50	Max.0.045	Max.0.030	7.00~10.50	18.00~20.00	-	-	0.10~0.25	-
-	Max.0.08	Max.1.00	Max.2.50	Max.0.045	Max.0.030	7.50~10.50	18.00~20.00	-	-	0.15~0.30	Nb Max.0.15
304LN	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	8.50~11.50	17.00~19.00	-	-	0.12~0.22	-
-	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	8.00~10.50	17.00~19.00	-	1.00~3.00	-	-
305	Max.0.12	Max.1.00	Max.2.00	Max.0.045	Max.0.030	10.50~13.00	17.00~19.00	-	-	-	-
309S	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	12.00~15.00	22.00~24.00	-	-	-	-
310S	Max.0.08	Max.1.50	Max.2.00	Max.0.045	Max.0.030	19.00~22.00	24.00~26.00	-	-	-	-
316	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	10.00~14.00	16.00~18.00	2.00~3.00	-	-	-
316L	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	12.00~15.00	16.00~18.00	2.00~3.00	-	-	-
316N	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	10.00~14.00	16.00~18.00	2.00~3.00	-	0.10~0.22	-
316LN	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	10.50~14.50	16.50~18.50	2.00~3.00	-	0.12~0.22	-
-	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	10.00~14.00	16.00~18.00	2.00~3.00	-	-	Ti Min.5xC%
-	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	10.00~14.00	17.00~19.00	1.20~2.75	1.00~2.50	-	-
-	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	12.00~16.00	17.00~19.00	1.20~2.75	1.00~2.50	-	-
-	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Min.0.10	10.00~14.00	16.00~18.00	2.00~3.00	-	-	-
317	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	11.00~15.00	18.00~20.00	3.00~4.00	-	-	-
317L	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	11.00~15.00	18.00~20.00	3.00~4.00	-	-	-
-	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	11.00~15.00	18.00~20.00	3.00~4.00	-	0.10~0.22	-
-	Max.0.04	Max.1.00	Max.2.50	Max.0.045	Max.0.030	15.00~17.00	16.00~19.00	4.00~6.00	-	-	-
-	Max.0.03	Max.1.00	Max.2.00	Max.0.045	Max.0.030	24.00~26.00	19.00~24.00	5.00~7.00	-	Max.0.25	-
-	Max.0.02	Max.1.00	Max.2.00	Max.0.045	Max.0.030	23.00~28.00	19.00~23.00	4.00~5.00	1.00~2.00	-	-
321	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	9.00~13.00	17.00~19.00	-	-	-	Ti Min.5xC%
347	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	9.00~13.00	17.00~19.00	-	-	-	Nb Min.10xC%
304Cu	Max.0.08	Max.1.00	Max.2.00	Max.0.045	Max.0.030	8.50~10.50	17.00~19.00	-	3.00~4.00	-	-
-	Max.0.08	3.00~5.00	Max.2.00	Max.0.045	Max.0.030	11.50~15.00	15.00~20.00	-	-	-	-

CHEMICAL COMPOSITION OF STAINLESS STEEL

Grade (AISI)	Chemical Composition (%)										OTHER
	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	N	
Ferritic group											
405	Max.0.08	Max.1.00	Max.1.00	Max.0.040	Max.0.030	-	11.50~14.50	-	-	-	Al 0.10~0.30
-	Max.0.03	Max.1.00	Max.1.00	Max.0.040	Max.0.030	-	11.00~13.50	-	-	-	-
430	Max.0.12	Max.0.75	Max.1.00	Max.0.040	Max.0.030	-	16.00~18.00	-	-	-	-
430F	Max.0.12	Max.1.00	Max.1.25	Max.0.060	Min.0.15	-	16.00~18.00	-2	-	-	-
434	Max.0.12	Max.1.00	Max.1.00	Max.0.040	Max.0.030	-	16.00~18.00	0.75~1.25	-	-	-
-	Max.0.01	Max.0.40	Max.0.40	Max.0.030	Max.0.020	-	28.50~32.00	1.50~2.50	-	Max.0.015	-
-	Max.0.01	Max.0.40	Max.0.40	Max.0.030	Max.0.020	-	25.00~27.50	0.75~1.50	-	Max.0.015	-
Duplex group											
329	Max.0.08	Max.1.00	Max.1.50	Max.0.040	Max.0.030	3.00~6.00	23.00~28.00	1.00~3.00	-	-	-
S31803	Max.0.03	Max.1.00	Max.2.00	Max.0.040	Max.0.030	4.50~6.50	21.00~24.00	2.50~3.50	-	0.08~0.20	-
S31260	Max.0.03	Max.1.00	Max.1.50	Max.0.040	Max.0.030	5.50~7.50	24.00~26.00	2.50~3.50	-	0.08~0.30	-
Martensitic group											
403	Max.0.15	Max.0.50	Max.1.00	Max.0.040	Max.0.030		11.50~13.00	-	-	-	-
410	Max.0.15	Max.1.00	Max.1.00	Max.0.040	Max.0.030		11.50~13.50	-	-	-	-
-	0.08~0.18	Max.0.60	Max.1.00	Max.0.040	Max.0.030		11.50~14.00	0.30~0.60	-	-	-
-	Max.0.15	Max.1.00	Max.1.00	Max.0.040	Max.0.030		11.50~13.50	-	-	-	Pb 0.05~0.30
416	Max.0.15	Max.1.00	Max.1.25	Max.0.060	Min.0.15		12.00~14.00	-2	-	-	-
420	0.16~0.25	Max.1.00	Max.1.00	Max.0.040	Max.0.030		12.00~14.00	-	-	-	-
420	0.26~0.40	Max.1.00	Max.1.00	Max.0.040	Max.0.030		12.00~14.00	-	-	-	-
420F	0.26~0.40	Max.1.00	Max.1.25	Max.0.060	Min.0.15		12.00~14.00	-2	-	-	-
-	0.26~0.40	Max.1.00	Max.1.00	Max.0.040	Max.0.030		12.00~14.00	-	-	-	Pb 0.05~0.30
431	Max.0.20	Max.1.00	Max.1.00	Max.0.040	Max.0.030	1.25~2.50	15.00~17.00	-	-	-	-
440A	0.60~0.75	Max.1.00	Max.1.00	Max.0.040	Max.0.030		16.00~18.00	-3	-	-	-
440B	0.75~0.95	Max.1.00	Max.1.00	Max.0.040	Max.0.030		16.00~18.00	-3	-	-	-
440C	0.95~1.20	Max.1.00	Max.1.00	Max.0.040	Max.0.030		16.00~18.00	-3	-	-	-
S44020	0.95~1.20	Max.1.00	Max.1.25	Max.0.060	Min.0.15		16.00~18.00	-3	-	-	-
Precipitation Hardening group											
S17400	Max.0.07	Max.1.00	Max.1.00	Max.0.040	Max.0.030	3.00~5.00	15.00~17.50	-	3.00~5.00	-	Nb 0.15~0.45
S17700	Max.0.09	Max.1.00	Max.1.00	Max.0.040	Max.0.030	6.50~7.75	16.00~18.00	-	-	-	Al 0.75~1.50